



**profiles welded at High Frequency
on DEL/FLEX and SOUPLEX belts**

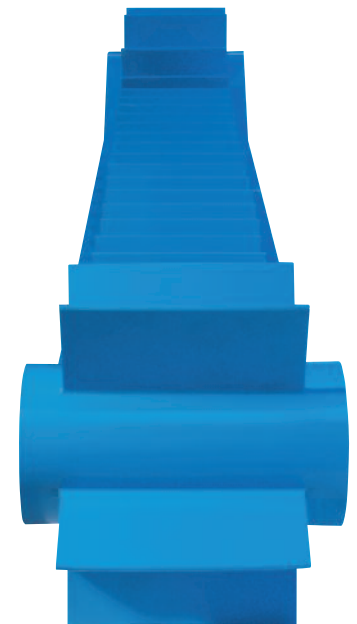


Profiles

Quality: **DEL/FLEX, SOUPLEX.**
 Maximum width: 800 mm.
 Thickness: 3, 4, and 7 mm.
 Minimum height: 10 mm.
 Maximum height: 100 mm.
 Minimum pitch: 70 mm.

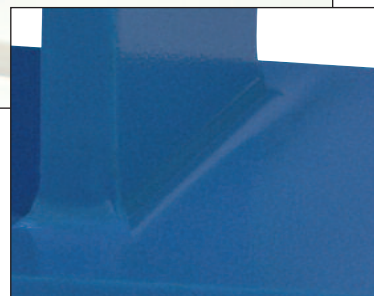

- No glue, no added polyurethane (welding at high frequency).
- Excellent resistance to tear.
- Profile with rounded base:
 - easy to clean,
 - reduces bacteria development.

**profiles welded by hot air
on DEL/ROC, DEL/FLEX and SOUPLEX belts**

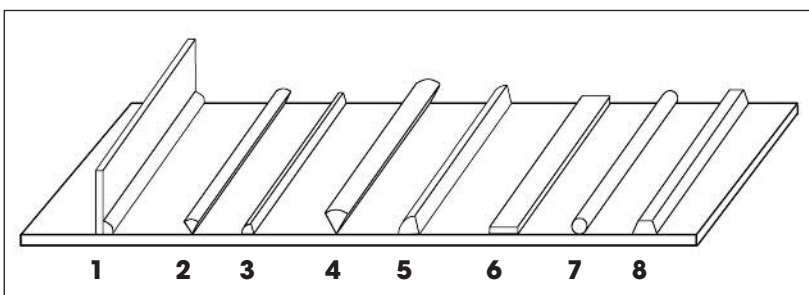

Profiles


Quality: **DEL/ROC, DEL/FLEX, SOUPLEX.**
 Maximum width: As wide as the belt.
 Thickness: 2, 3, 4, and 5 mm.
 Minimum height: 10 mm.
 Maximum height: Depends on thickness.
 Minimum pitch: height of the profile.

- 1 - Right or inclined profiles welded with welding beading.
- 2 - 4 mm-high triangle, welded on its point.
- 3 - 4 mm-high triangle, welded on its side.
- 4 - 6 mm-high triangle, welded on its point.
- 5 - 6 mm-high triangle, welded on its side.
- 6 - Flat profile.
- 7 - Round profile.
- 8 - V profile.


Other profile: consult us.



belts with profiles

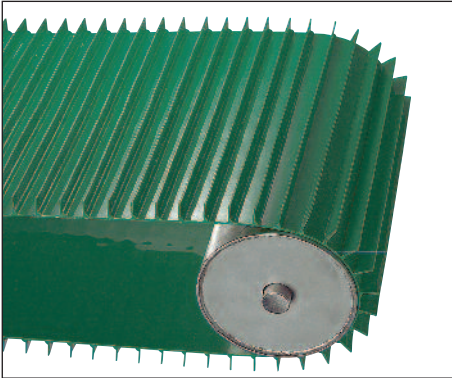


Profiles ...very close

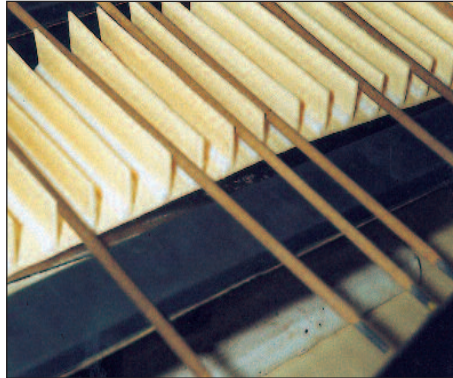


...very high




...inclined

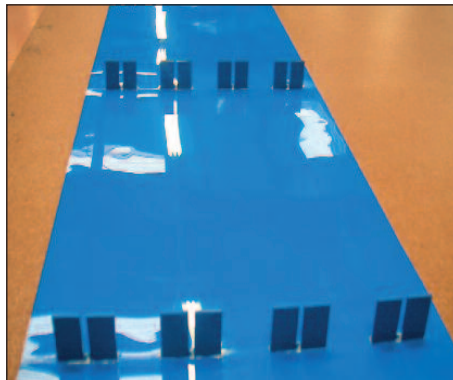



...specials

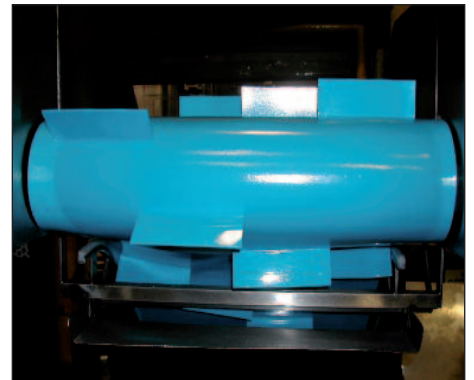

special belts

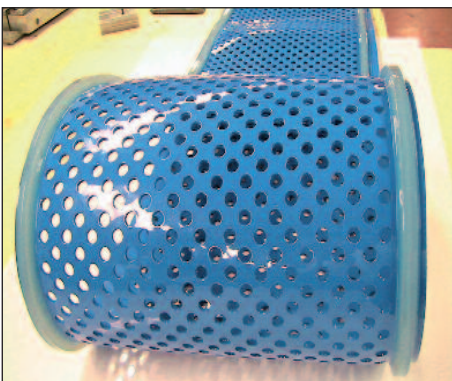

...with holes on demand

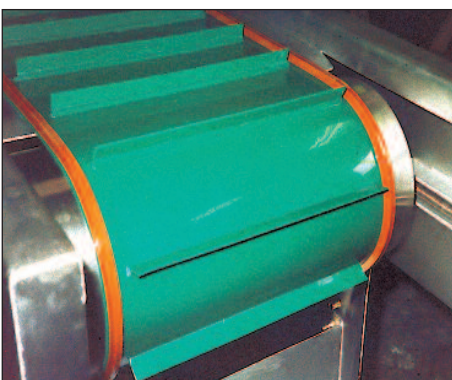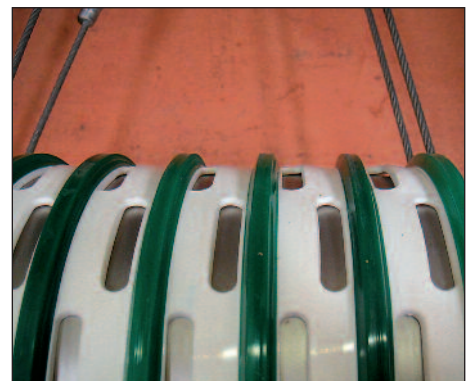

...with V guides and profiles



...with sidewalls



...U-shape