


# VIT/GLISS runner for round belts


Manufactured out of High Density Polyethylene (H.D.PE), our VIT/GLISS runners will both perfectly guide your belts and improve the load capacity of each belt by reducing its friction on its runner.

## Advantages :

- Perfect guiding of the belts.
- Low friction coefficient.
- Excellent resistance against abrasion.
- Shock-proof.
- Good resistance against corrosion and many chemical agents.
- Maximum continuous working temperature : +70°C.
- Extreme temperature limits : -40°C to +100°C.

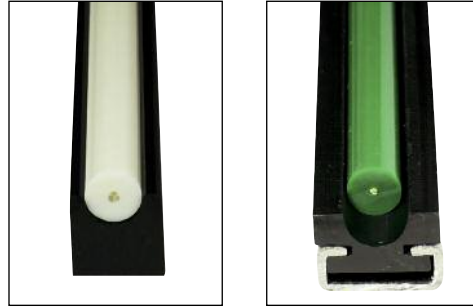


With steel rail.  
(stainless steel on demand and according to quantities).  
Delivered in bars of 3 m.



Ref.	Belt diam.	L	H	r	h
R 6	∅ 6	20	10	4	4
R 8	∅ 8	20	12	5	5
R 10	∅ 9.5 - 10	25	15	6	6
R 12	∅ 12 - 12.5	30	20	7	8
R 15	∅ 15	35	25	8.5	10
R 18	∅ 18	40	25	10	12

Ref.	Belt diam.	L	H	r	h	Hc	Lc
RC 6	∅ 6	20	15	4	4	18	20
RC 8	∅ 8	20	15	5	5	18	20
RC 10	∅ 9.5 - 10	20	15	6	6	20	20
RC 12	∅ 12 - 12.5	28	15	7	8	20	28
RC 15	∅ 15	33	20	8.5	10	25	38
RC 18	∅ 18	38	20	10	12	25	38






- **White HDPE runners for food industry.**
- **C-shape stainless steel rail.**
- **Special runners following our customers schemes.**

Consult us.

## Attention :

Take care of the HDPE longitudinal dilatation : 2 mm per metre for a 10°C increase in temperature.


# runners for curved conveyors



**These runners can be bent without any special tool to be fixed on curved conveyors, thanks to their flexibility.**

2 standard sizes for ∅ 12 mm round belts :  
**25 x 16 mm and 20 x 20 mm.**

Recommended belts :  
**POLY/FLEX** or any other frosted belt.

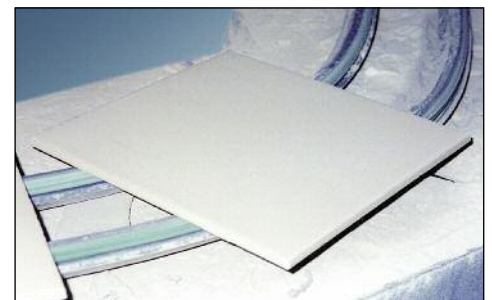


Manufactured out of High Density Polyethylene (H.D.P.E), our VIT/GLISS runners will both perfectly guide your belts and improve the load capacity of each belt by reducing its friction on its runner.

### Advantages :

- Perfect guiding of the belts.
- Low friction coefficient.
- Excellent resistance against abrasion.
- Shock-proof.
- Good resistance against corrosion and many chemical agents.
- Maximum continuous working temperature : +70°C.
- Extreme temperature limits : -40°C to +100°C.




With steel rail.  
(Stainless steel on demand and according to quantities).  
Delivered in bars of 3 m.



Ref.	Belt dimensions	L	H	I	h
T 10	10 x 6	20	10	7	4
T 13	13 x 8	20	12	9	5
T 17	17 x 11	30	15	12	8
T 22	22 x 14	35	20	15	10
T 32	32 x 19	50	30	21	13

Ref.	Belt dimensions	L	H	I	h	Hc	Lc
TC 10	10 x 6	20	15	7	4	18	20
TC 13	13 x 8	20	18	9	5	22	20
TC 17	17 x 11	30	18	12	8	24	28
TC 22	22 x 14	35	25	15	10	30	38
TC 32	32 x 19	50	30	21	13	38	38



- **White HDPE runners for food industry.**
- **C-shape stainless steel rail.**
- **Special runners following our customers schemes.**

Consult us.

### Attention :

Take care of the HDPE longitudinal dilatation, which is of 2 mm per metre for a 10°C increase in temperature.

## special runners for V belts



Out-of-center grooves and chamfer.



Thin edges.



Double grooves - multi grooves.

SPECIAL PROFILES ON DEMAND.

