

SPECIAL BELTS



BLACK PRIMAFLEX

Colour	Black
Material	Polyurethane
Hardness	90 ShA
Upper surface	Smooth
Lower surface	Smooth or brushed



Standard embossing possible
on the upper side.

Feature

- Shock resistant.
- Abrasion resistant.
- Resistant to cuts.
- Tear resistant.

Application

- Saw blade protection.
- Bibs, scrapers, protection...

Flat belt width < 100mm	Conveyor Belt width ≥ 100mm	Belt Thickness (mm)	Maximum Width (mm)	Weight (kg/m ²)
PRPN3	PRBN3	3	360	3.75
PRPN4	PRBN4	4	360	5

FLAT BELT AND MULTI-MATERIAL BELT

- Standard thickness material can be laminated to create a thicker product.
- Maximum width: 140 mm. • Maximum thickness: 35 mm.

Product	DEL/FLEX		SOUPLEX	ELASTOBELT	TOTALGRIP
Hardness	95 ShA	93 ShA	85 ShA	80 / 70 ShA	70 ShA
Colour	Blue	Green, White	Blue, Green and White	Blue	Translucent
Thickness	2 - 3 - 4 - 5mm		2 - 3 - 4 - 5mm	1.6 - 3mm	1.5 - 3 - 4mm


Embossing possible on one side.






FLAT BELTS


FLAT BELT

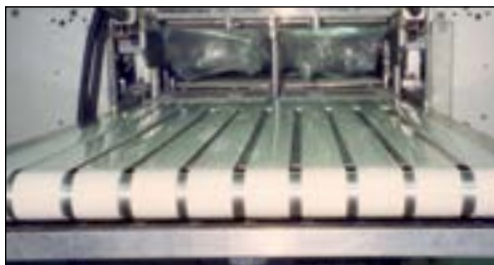

- Flat belt: any width < 100 mm.
- * Quality: **DEL/ROC, DEL/FLEX, SOUPLEX, TOTALGRIP** and **ELASTOBELT**.
- * Studded, Sawtooth, SG3 and lattice are possible on all polyurethane materials.



BARS

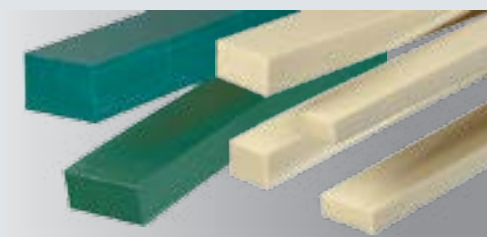

- Material: **DEL/ROC, DEL/FLEX, SOUPLEX, TOTALGRIP, ELASTOBELT**.
- Maximum width: 140 mm
- Max thickness: 35 mm.

FLAT BELT COVERINGS

- Applied on **DEL/ROC, DEL/FLEX** and **SOUPLEX** belts (except PVC griptop on **DEL/FLEX** Belt).
- Maximum width: 140 mm.



Griptop PVC
35 ShA (NA)



Griptop rubber
50 ShA (NC)



Polyester felt
(FP)



Aramid felt
(FA)



Linatex
40 ShA (LI)

Other coatings, please contact us.