


ANTI-MICROBIAL BELTS


Thermoweldable, positively driven, monolithic belts, with an infused antimicrobial feature.

FOOD APPROVED

DEL/DRIVE 50

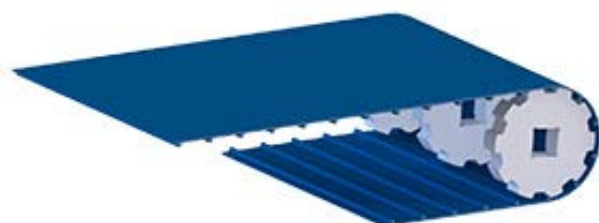


POSITIVEBELT

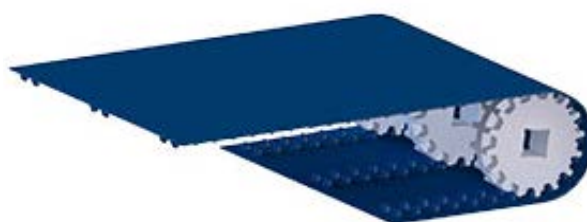

BELT CHARACTERISTICS

- Fabric without a textile weft, waterproof and rot-proof.
- Positive drive.
- No risk of slippage.
- Flexible and lightweight.
- Tension-free operation.
- Resistant to cuts, tearing and abrasion.
- Resistant to water, detergents, animal and vegetable oils and fats.
- Easy, fast and efficient cleaning.
- Significant savings in water and detergent consumption.

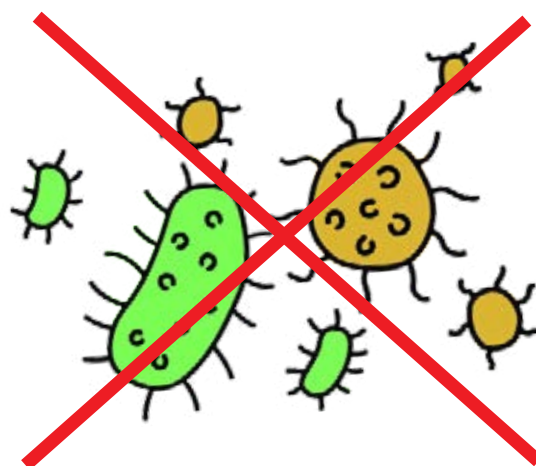

ADVANTAGES OF ANTIMICROBIAL TREATMENT IN THE MASS

- Prevents propagation of bacteria, moulds and other micro-organisms over the entire belt surfaces:
 - in hard to reach areas where cleaning is difficult,
 - where the belt surfaces are worn, scratched or split, which are breeding grounds for bacteria.
- Reduces odour development.
- Extends belt life.
- Reduces cleaning and disinfection times.


ANTI-MICROBIAL BELTS

FOOD APPROVED


DEL/DRIVE 50

POSITIVEBELT

	DEL/DRIVE® 50AM	DEL/DRIVE® 50AMEM	POSITIVEBELT PO2® AM
Reference	DDB50B3AM	DDB50B3AMEM	PO331LB2AM
Material	Polyurethane antimicrobial	Polyurethane antimicrobial	Polyurethane antimicrobial
Color	Dark blue	Dark blue	Dark blue
Quality Food	EU	EU	EU
Top surface	Smooth	Embossed	Smooth
Hardness	95 ShA	95 ShA	95 ShA
Pitch (mm)	50	50	31.5
Real pitch ± 0.1 (mm)	50.2	50.2	31.5
Thickness (mm)	3	3	3.2
Overall thickness (mm)	8.6	8.6	/
Spacing (mm)	/	/	200
Maximum width (mm)	1 800	1 800	1 000
Weights	4.8 kg/m ²	4.8 kg/m ²	4.8 kg/m ²
Mini pulley diameter (mm)	95	95	100
Mini pulley diameter – back flex (mm)	100	100	100
Temperature range	-20°C à +60°C	-20°C à +60°C	-20°C à +75°C
Traction force For 100 mm width	65 daN to 2.5% elongation	65 daN to 2.5% elongation	70 daN to 3% elongation
Friction coefficient			
On HPDE bed	0.2	0.2	0.35
Sur sole Inox	0.52	0.52	0.6
On stainless steel bed	On stock	On demand	On stock

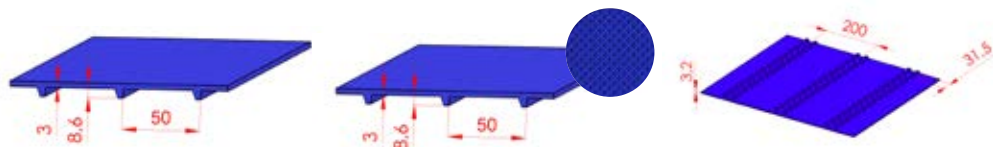

MAFDEL
 Z.I. Lafayette - 131, rue de la Plaine
 38790 Saint Georges d'Espérance - FRANCE
 Tel. +33 (0)4 78 96 21 90 - mafdel@mafdel.fr
 www.mafdel-belts.com

