

TOOLING



BUTT WELDING

FLAT BELT AND CONVEYOR BELTS UP TO 210MM IN WIDTH



MC50 iron

Power: 150 W



J50 clamp

for flat belting ≤ 60 mm
and round belting of all diameters



MC100 iron

Power: 220 W



J100L clamp

For flat belting ≤ 120 mm
and flat belting with trapezoidal guides
10x6mm and 13x8mm



MC200 iron

Power : 300 W



J200L clamp

For belts ≤ 210 mm
and belts with trapezoidal guides
13x8mm or 17x11mm

MC50 / J50 tool case includes:

- MC50 iron
- J50 clamp
- S135 shear
- B10 trimming pliers





TOOLING

BUTT WELDING

FLAT BELT AND CONVEYOR BELTS UP TO 1100MM IN WIDTH



Welding kit:	Welding blade	Welding table	Box	For belts
KITSOUDURED400 :	MD400	JD400	CAISSE400	width ≤ 400 mm
KITSOUDURED650 :	MD650	JD650	CAISSE650	width ≤ 650 mm
KITSOUDURED1100 :	MD1100	JD1100	CAISSE1100	width ≤ 1100 mm

+ Accessories



1/4 - MOON KNIFE
 LUNE



TRIMMING FORK -
 F19



CUT RESISTANT GLOVES -
 GANTSPRO

TOOLING

HOT AIR WELDING

CONVEYOR BELTS WITH A WIDTH OF 1100 TO 1900 MM
WELDING TO THE CORD USING A HOT AIR GUN



Welding kit:	Welding table	Box	For belts
KITSOUDURED1400 :	T1400	CAISSE1400	width ≤ 1400 mm
KITSOUDURED1900 :	T1900	CAISSE1900	width ≤ 1900 mm

+ Accessories



AFFLEUREUSE-001



FRAISE 60-001



TRIMMING FORK -
F19



GABARIT-AFFL-001



FRAISE2T-001



CUT RESISTANT
GLOVES -
GANTSPRO

OUT OF KIT

+ TR500



+ BUSE BR5 OU BR7



Hot blowtorch + abusus, not
included in the kit.

Contact us



TOOLING


OTHER METHODS OF JOINING

HEAT PRESS WELDING

Method similar to standard belt types.

- DEL/FLEX and SOUPLEX belts: Belt ends cut square and overlapped 5mm in a press.

This process is not suitable for DEL/ROC belts.

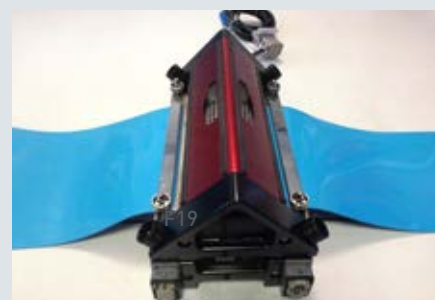

STAINLESS FASTENERS

- Joints comprise 2 half-staples with a coated stainless pin.
- For belt thickness 1.5 mm to 5 mm.
- All widths.
- Fasteners are hammered on by using a special tool and a specially designed jig.
- Suitable for all DEL/ROC, DEL/FLEX and SOUPLEX bands.



PLASTIC WELDED FASTENERS

- Available on certain thicknesses of polyurethane or polyester monolithics. Please enquire.
- Food quality (EC - FDA).
- Allows use on metal detectors.
- Up to 1100 mm in width, beyond consulting us

