





«THE STANDARD OF POSITIVE BELT»

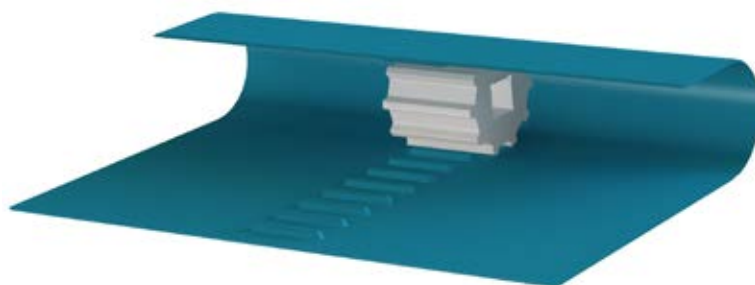


	S/DRIVE
Reference	SDB40B3
Material	Polyurethane
Colour	Blue
Food	CE / FDA
Top surface	Smooth
Hardness	95 ShA
Pitch (mm)	40
Real pitch $\pm 0,2$ (mm)	39,7
Thickness (mm)	3
Total thickness (mm)	10,6
Max width (mm)	1550
Weights	3,6 kg/m ²
Min. pulley diameter (mm)	100
Min. pulley diameter - back flex (mm)	100
Temperature range	-20°C to +60°C
Traction force at 2% elongation	65 daN
Friction coefficient	
On HDPE bed	0,2
On stainless steel bed	0,52

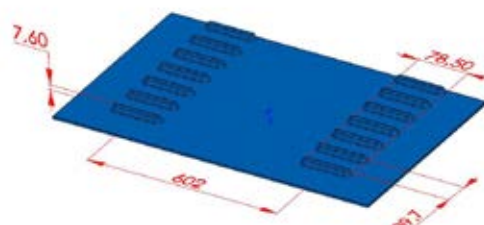




S/DRIVE®

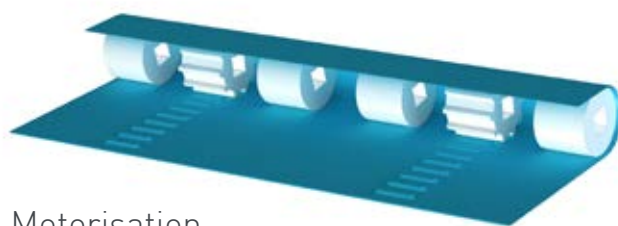

Motorisation

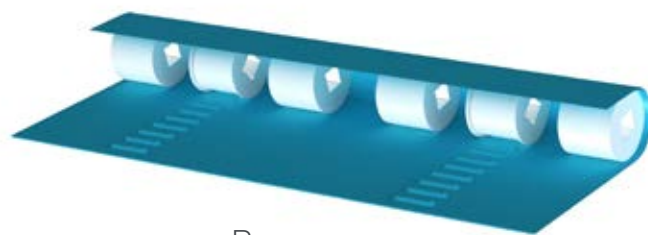

Reverse

SPROCKETS, WHEELS AND PULLEYS FOR BELTS SDB40B3



REFERENCE	PRODUCT	MATERIAL	COLOUR	OUTER DIAMETER (mm)	INSIDE DIAMETER (mm)	NUMBER OF TEETH	SQUARE BORE (mm)	WIDTH (mm)
P40BUN08C40	Sprocket	HDPE	Blue	101,4	-	8	40	100
R40BUN08C40	Wheel				-	-		
D40BUN08C40	Pulley			-	85,4	-		
P40BUN10C40	Sprocket	HDPE	Blue	127,5	-	10	40	100
R40BUN10C40	Wheel				-	-		
D40BUN10C40	Pulley			-	111,5	-		
P40BUN12C40	Sprocket	HDPE	Blue	152,8	-	12	40	100
R40BUN12C40	Wheel				-	-		
D40BUN12C40	Pulley			-	136,8	-		
P40BUN14C40	Sprocket	HDPE	Blue	178,8	-	14	40	100
R40BUN14C40	Wheel				-	-		
D40BUN14C40	Pulley			-	162,8	-		
P40BUN16C40	Sprocket	HDPE	Blue	204,8	-	16	40	100
R40BUN16C40	Wheel				-	-		
D40BUN16C40	Pulley			-	188,8	-		
P40BUN18C40	Sprocket	HDPE	Blue	230,7	-	18	40	100
R40BUN18C40	Wheel				-	-		
D40BUN18C40	Pulley			-	214,7	-		
P40BUN20C40	Sprocket	HDPE	Blue	256,7	-	20	40	100
R40BUN20C40	Wheel				-	-		
D40BUN20C40	Pulley			-	240,7	-		

Sprockets, wheels and pulleys with 1.5" square bore on request